


Floor Scales ZBW

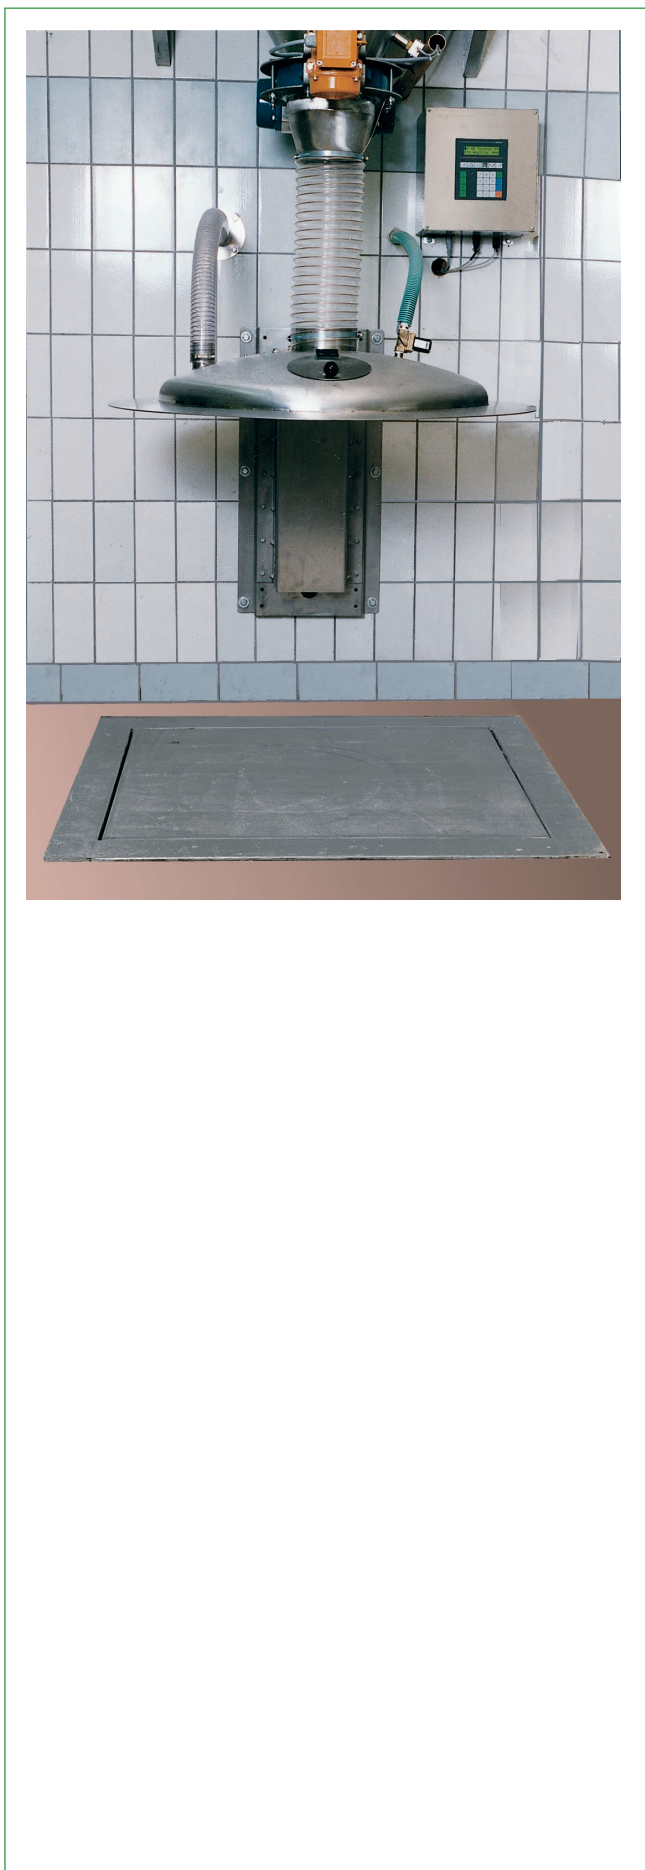

Basic technical information

Scale type:	floor scale counter-sunk or with liftable flat key
Scale range:	0 – 1,000 kg
Scale accuracy:	50 – 100 grams
Scale bridge size:	1.000 x 800 x 230 (counter-sunk) 1.200 x 1.000 x 230 (counter-sunk) 1.000 x 800 x 1.000 x 40 (liftable) 1.200 x 1.000 x 40 (liftable)
Operating terminal:	wall construction as Touch-screen 6" or 15"
Online connection to:	none or Backcontrol
Weighing bridge material:	stainless steel
Weighing measuring cells:	10 V DC
Drip tray:	included or excluded
Lift-up lid:	included or excluded

Intended use

Floor scale for installation on the floor with stainless steel tray and syphon connection due to outlet and cleaning or with liftable flat key.

Automatable ingredient weighing with online connection to the recipe computer. (own offer item)

Liquid components such as yeast, sourdough, etc. can be automatically pumped as components into the kneader bowl and the recipe is controlled, as other manual ingredients.

General function

The floor scale is constructed especially for weighing mobile kneader bowls and dough components.

Customarily, an extraction hood is used for the floor scale.

The control of the scale is via PLC and Recipe computer or via own cradle terminal.

Construction

All surface parts are made of stainless steel for faster cleaning can be implemented the passable bridge section opening by hinges.

Symbol pictures – technical modifications reserved!